

AD-A175 934

METEOROLOGICAL SUPPORT TO THE EASTERN TEST RANGE(U)
EASTERN SPACE AND MISSILE CENTER PATRICK AFB FL
B F BOVD ET AL. JAN 87 ESMC-TR-87-01

1/1

UNCLASSIFIED

F/G 4/2

NL

END
NO
54



MICROCOPY RESOLUTION TEST CHART
NATIONAL BUREAU OF STANDARDS-1963-A

SECURITY CLASSIFICATION OF THIS

AD-A175 934

AGE

E MARKINGS

1a. REPORT SECURITY CLASSIFICATION Unclassified		3. DISTRIBUTION/AVAILABILITY OF REPORT Approved for public release, distribution unlimited.	
2a. SECURITY CLASSIFICATION AUTHORITY N/A		5. MONITORING ORGANIZATION REPORT NUMBER(S) ESMC-TR-87-01	
2b. DECLASSIFICATION/DOWNGRADING SCHEDULE		7a. NAME OF MONITORING ORGANIZATION ETR/RA, STINFO, Ms Brown, 854-2803	
4. PERFORMING ORGANIZATION REPORT NUMBER(S)		7b. ADDRESS (City, State and ZIP Code) Patrick AFB, FL 32925	
6a. NAME OF PERFORMING ORGANIZATION Eastern Space and Missile Center	6b. OFFICE SYMBOL (If applicable) ESMC/WER	9. PROCUREMENT INSTRUMENT IDENTIFICATION NUMBER	
6c. ADDRESS (City, State and ZIP Code) Patrick AFB, FL 32925		10. SOURCE OF FUNDING NOS. PROGRAM ELEMENT NO. PROJECT NO. TASK NO. WORK UNIT NO.	
8a. NAME OF FUNDING/SPONSORING ORGANIZATION		11. TITLE (Include Security Classification) Meteorological Support to the Eastern Test Range (Unclassified)	
8b. OFFICE SYMBOL (If applicable)		12. PERSONAL AUTHOR(S) B. F. Boyd, T. M. Myers, and F. P. Lockwood	
8c. ADDRESS (City, State and ZIP Code)		13a. TYPE OF REPORT Descriptive (Final)	
		13b. TIME COVERED FROM 1983 TO 1986	
		14. DATE OF REPORT (Yr., Mo., Day) Jan 87	
		15. PAGE COUNT 4	
16. SUPPLEMENTARY NOTATION Report published in the American Meteorological Society's Sixth Symposium on Meteorological Observations and Instrumentation.			
17. COSATI CODES FIELD GROUP SUB GR		18. SUBJECT TERMS (Continue on reverse if necessary and identify by block number) Meteorology, Range Support, Instrumentation, Forecasting, Observations	
19. ABSTRACT (Continue on reverse if necessary and identify by block number) Background is presented on the organizational structure and mission of weather support to the Eastern Test Range. The meteorological observational systems are presented and the data analysis and display system described. Computer programs, model support, and some current and projected forecasting improvement efforts are listed.			
20. DISTRIBUTION/AVAILABILITY OF ABSTRACT UNCLASSIFIED/UNLIMITED <input checked="" type="checkbox"/> SAME AS RPT. <input type="checkbox"/> DTIC USERS <input type="checkbox"/>		21. ABSTRACT SECURITY CLASSIFICATION Unclassified	
22a. NAME OF RESPONSIBLE INDIVIDUAL B. F. Boyd		22b. TELEPHONE NUMBER (Include Area Code) 305-494-5915	22c. OFFICE SYMBOL ESMC/WER

OTIC FILE COPY

JAN 12 1987

DD FORM 1473, 83 APR

EDITION OF 1 JAN 73 IS OBSOLETE.

UNCLASSIFIED
SECURITY CLASSIFICATION OF THIS PAGE

INSTRUCTIONS FOR PREPARATION OF REPORT DOCUMENTATION PAGE

GENERAL INFORMATION

The accuracy and completeness of all information provided in the DD Form 1473, especially classification and distribution limitation markings, are the responsibility of the authoring or monitoring DoD activity.

Because the data input on this form will be what others will retrieve from DTIC's bibliographic data base or may determine how the document can be accessed by future users, care should be taken to have the form completed by knowledgeable personnel. For better communication and to facilitate more complete and accurate input from the origination of the form to those processing the data, space has been provided for the name, telephone number and office symbol of the DoD person responsible for the input cited on the form. These are to be noted in Block 22.

All information on the DD Form 1473 should be typed.

Only information appearing on or in the report, or applying specifically to the report in hand should be reported. If there is any doubt, the block should be left blank.

Some of the information on the forms (e.g., title, abstract) will be machine-indexed. The terminology used should describe the content of the report or identify it as precisely as possible for future identification and retrieval.

SPECIAL NOTE: UNCLASSIFIED ABSTRACTS AND TITLES DESCRIBING CLASSIFIED DOCUMENTS MAY APPEAR SEPARATELY FROM THE DOCUMENTS IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT BULLETINS AND BIBLIOGRAPHIES OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE RDT/E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS AND TITLES.

The Defense Technical Information Center (DTIC) is ready to offer assistance to anyone who needs and requests it. Call Data Base Input Division (AUTOVON) 284-7044; Com 202-274-7044.

SPECIFIC BLOCKS

SECURITY CLASSIFICATION OF THE FORM:

In accordance with DoD 5200.1-R, Information Security Program Regulation, Chapter V1 Section 2, paragraph 4-200, classification markings are to be stamped, printed, or written at the tops and bottom of the form in capital letters that are larger than those used in the text of the document. See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Section II, paragraph 11a(2). This form should be nonclassified, if possible.

Block 1.a. Report Security Classification: Designate the highest security classification of the report. (See DoD 5200.00.1-R, Chapters I, IV, VII, XI, Appendix A).

Block 1.b. Enter the restricted marking or warning notice of the report (e.g., CNWDI, RD, NATO).

Block 2.a. Security Classification Authority: Enter the commonly used markings in accordance with DoD 5200.1-R, Chapter IV, Section 4, paragraph 4-400 and 4-402. Indicate classification authority.

Block 2.b. Declassification/Downgrading Schedule: Indicate specific date or event for declassification or the notation "Originating Agency Determination Required" or "OADR." Also insert (when applicable) downgrade to: _____ on _____, (e.g., "Downgrade to Confidential on 6 July 1983"). (See also DoD 5220.22-M, Industrial Security Manual for Safeguarding Classified Information, Appendix II).

NOTE: Entry must be made in Blocks 2.a. and 2.b. except when the original report is unclassified and has never been upgraded.

Block 3. Distribution/Availability Statement of Report: Insert the statement as it appears on the report. If a limited distribution statement is used, the reason must be one of those given by DoD Directive 5200.20, Distribution Statements on Technical Documents. The Distribution Statement should provide for the broadest distribution possible within limits of security and controlling office limitations.

Block 4. Performing Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the organization originating or generating the report from its research and whose name appears in Block 6. These numbers should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Performing Organization is also the Monitoring Agency, enter the report number in Block 4.

Block 5. Monitoring Organization Report Number(s): Enter the unique alphanumeric report number(s) assigned by the Monitoring Agency. This should be a number assigned by a Department of Defense or other government agency and should be in accordance with ANSI STD 239.23-74 "American National Standard Technical Report Number." If the Monitoring Agency is the same as the Performing Organization enter the report number in Block 4 and leave Block 5 blank.

Block 6.a. Performing Organization: For in-house reports, enter the name of the performing activity. For reports prepared under contract or grant, enter the contractor or the grantee who generated the report and identify the appropriate corporate division, school, laboratory, etc., of the author.

Block 6.b. Enter the office symbol of the performing organization.

Block 6.c. Enter the address of the performing organization, list city, state and ZIP code.

Block 7.a. Monitoring Organization - Name: This is the agency responsible for administering or monitoring a project, contract, or grant. If the monitor is also the performing organization, leave Block 7.a. blank. In the case of joint sponsorship, the monitoring organization is determined by advanced agreement. It can be either an office, a group, or a committee representing more than one activity, service or agency.

Block 7.b. Enter the address of the monitoring organization. Include city, state and ZIP code.

Block 8.a. Funding (Sponsoring) Organization — Name: Enter the full official name of the organization under whose immediate funding the document was generated, whether the work was one in-house or by contract. If the Monitoring Organization is the same as the Funding Organization, leave Block 8.a. blank.

Block 8.b. Enter the office symbol of the Funding (Sponsoring) Organization.

Block 8.c. Enter the address of the Funding (Sponsoring) Organization. Include city, state and ZIP code.

Block 9. Procurement Instrument Identification Number (Contract, Grant, or other Funding Instrument): For a contractor or grantee report, enter the complete contract or grant number(s) under which the work was accomplished. Leave this block blank for in-house reports.

Block 10. Source of Funding (Program Element, Project, Task Area, and Work Unit Number(s)): These four data elements relate to the DoD budget structure and provide program and/or administrative identification of the source of support for the work being carried on. Enter the program element, project, task area, work unit number, or their equivalents that identify the principal source of funding for the work required. These codes may be obtained from the applicable DoD forms such as the DD Form 1498 (Research and Technology Work Unit Summary) or from the fund citation of the funding instrument. If this information is not available to the authoring activity, these blocks should be filled in by the responsible DoD Official designated in Block 22. If the report is funded from multiple sources, identify only the Program Element and the Project, Task Area and Work Unit Numbers of the principal contributor.

Block 11. Title and Its Security Classification: Enter the title in Block 11 in initial capital letters exactly as it appears on the report. Titles on all classified reports, whether classified or unclassified, must be immediately followed by the security classification of the title enclosed in parentheses. A report with a classified title should be provided with an unclassified version if it is possible to do so without changing the meaning or obscuring the contents of the report. Use specific, meaningful words that describe the content of the report so that when the title is machine-indexed, the words will contribute useful retrieval terms.

If the report is in a foreign language and the title is given in both English and a foreign language, list the foreign language title first, followed by the English title enclosed in parentheses. If part of the text is in English, list the English title first followed by the foreign language title enclosed in parentheses. If the title is given in more than one foreign language, use a title that reflects the language of the text. If both the text and titles are in a foreign language, the title should be translated, if possible, unless the title is also the name of a foreign periodical. Transliterations of often used foreign alphabets (see Appendix A of MIL-STD-847B) are available from DTIC in document AD-A080 800.

Block 12. Personal Author(s): Give the complete name(s) of the author(s) in this order: last name, first name and middle name. In addition, list the affiliation of the authors if it differs from that of the performing organization.

List all authors. If the document is a compilation of papers, it may be more useful to list the authors with the titles of their papers as a contents note in the abstract in Block 19. If appropriate, the names of editors and compilers may be entered in this block.

Block 13.a. Type of Report: Indicate whether the report is summary, final, annual, progress, interim, etc.

Block 13.b. Period of Time Covered: Enter the inclusive dates (year, month, day) of the period covered, such as the life of a contract in a final contractor report.

Block 14. Date of Report: Enter the year, month, and day, or the year and the month the report was issued as shown on the cover.

Block 15. Page Count: Enter the total number of pages in the report that contain information, including cover, preface, table of contents, distribution lists, partial pages, etc. A chart in the body of the report is counted even if it is unnumbered.

Block 16. Supplementary Notation: Enter useful information about the report in hand, such as: "Prepared in cooperation with . . .", "Translation at (or by) . . .", "Symposium . . ." If there are report numbers for the report which are not noted elsewhere on the form (such as internal series numbers or participating organization report numbers) enter in this block.

Block 17. COSATI Codes: This block provides the subject coverage of the report for announcement and distribution purposes. The categories are to be taken from the "COSATI Subject Category List" (DoD Modified), Oct 65, AD-624 000. A copy is available on request to any organization generating reports for the DoD. At least one entry is required as follows:

Field — to indicate subject coverage of report.

Group — to indicate greater subject specificity of information in the report.

Sub-Group — if specificity greater than that shown by Group is required, use further designation as the numbers after the period (.) in the Group breakdown. Use only the designation provided by AD-624 000.

Example: The subject "Solid Rocket Motors" is Field 21, Group 08, Subgroup 2 page 32, AD-624 000).

Block 18. Subject Terms: These may be descriptors, keywords, posting terms, identifiers, open-ended terms, subject headings, acronyms, code words, or any words or phrases that identify the principal subjects covered in the report, that conform to standard terminology and exact enough to be used as subject index entries. Certain acronyms or "buzz words" may be used if they are recognized by specialists in the field and have a potential for becoming accepted terms. "Laser" and "Reverse Osmosis" were once such terms.

If possible, this set of terms should be selected so that the terms individually and as a group will remain UNCLASSIFIED without losing meaning. However, priority must be given to specifying proper subject terms rather than making the set of terms appear "UNCLASSIFIED". Each term on classified reports must be immediately followed by its security classification, enclosed in parentheses.

For reference on standard terminology the "DTIC Retrieval and Indexing Terminology" DRIT-1979, AD-A068 500, and the DoD "Thesaurus of Engineering and Scientific Terms (TEST) 1968, AD-672 000, may be useful.

Block 19. Abstract: The abstract should be a pithy, brief (*preferably not to exceed 300 words*) factual summary of the most significant information contained in the report. However, since the abstract may be machine-searched, all specific and meaningful words and phrases which express the subject content of the report should be included, even if the word limit is exceeded.

If possible the abstract of a classified report should be unclassified and consist of publicly releasable information (*Unlimited*); but in no instance should the report content description be sacrificed for the security classification.

NOTE: AN UNCLASSIFIED ABSTRACT DESCRIBING A CLASSIFIED DOCUMENT MAY APPEAR SEPARATELY FROM THE DOCUMENT IN AN UNCLASSIFIED CONTEXT, E.G., IN DTIC ANNOUNCEMENT OR BIBLIOGRAPHIC PRODUCTS OR BY ACCESS IN AN UNCLASSIFIED MODE TO THE DEFENSE RDT&E ON-LINE SYSTEM. THIS MUST BE CONSIDERED IN THE PREPARATION AND MARKING OF UNCLASSIFIED ABSTRACTS.

For further information on preparing abstracts, employing scientific symbols, verbalizing, etc., see paragraph 2.1(n) and 2.3(b) in MIL-STD-847B.

Block 20. Distribution/Availability of Abstract: This block must be completed for all reports. Check the applicable statement either "unclassified/unlimited" or "same as report," or if the report is available to DTIC registered users "Abstract available to DTIC users."

Block 21. Abstract Security Classification: To ensure proper safeguarding of information, this block must be completed for all reports to designate the classification level of the entire abstract. For CLASSIFIED abstracts, each paragraph must be preceded by its security classification code in parentheses.

Blocks 22 a, b, c. Give name, telephone number and office symbol respectively of DoD person responsible for the accuracy of the completion of this form.

ESMC-TR-87-01

METEOROLOGICAL SUPPORT
TO THE EASTERN TEST RANGE


Billie F. Boyd
T. M. Myers
F. P. Lockwood
ESMC/WE Staff Meteorologist
Patrick Air Force Base, Florida 32925

January 1987

Descriptive 1983 - 1986
(Final)

Approved for Public Release;
Distribution Unlimited

Prepared for
EASTERN TEST RANGE
RANGE SUPPORT OFFICE
PATRICK AIR FORCE BASE, FLORIDA 32925

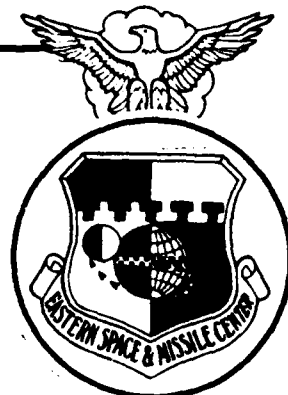

METEOROLOGICAL SUPPORT TO THE EASTERN TEST RANGE



B. F. Boyd, T. M. Myers, and F. P. Lockwood

Office of the Staff Meteorologist
 Eastern Space and Missile Center
 Patrick Air Force Base, Florida 32925

1. BACKGROUND

The Eastern Space and Missile Center (ESMC) is comprised of two major operational and a typical number of host organizations. The two major operational organizations of ESMC are the Eastern Test Range (ETR) and the 6555th Aerospace Test Group (ASTG). There are also numerous tenant organizations, including Detachment 11, 2nd Weather Squadron of the Air Weather Service, United States Air Force (USAF).

As a national range, the ETR supports the National Aeronautics and Space Administration (NASA), Army, Navy, Air Force, and foreign government space and missile programs. This support begins at Cape Canaveral and continues through the Caribbean and into the South Atlantic Ocean.

The most familiar mission of the ETR is its support to the Space Shuttle. Although Shuttle launches increased in frequency between 1981 and 1985 (see Table 1), those launches represented only a small part of the total launches at the ETR (see Table 2).

YEAR	NUMBER OF LAUNCHES
1980	0
1981	2
1982	3
1983	4
1984	5
1985	9
TOTAL	23

Table 1. Number of Shuttles launched at the ETR 1980-1985.

ORGANIZATION	NUMBER OF LAUNCHES
Air Force	11
NASA	61
Navy	123
Army	46
Total	241

Table 2. Summary of major launches at the ETR 1980-1985.

2. METEOROLOGICAL ORGANIZATION AND FUNCTION

The Commander, Detachment 11, 2nd Weather Squadron, is the Staff Meteorologist (ESMC/WE) to the ESMC. Detachment 11 provides meteorological, environmental, and aerospace support to the ESMC, ETR, NASA, Air Force Technical Applications Center (AFTAC), and DOD Manager for Space Transportation System Contingency Support Office (DDMS). Detachment personnel provide forecasts, observations, climatological studies, and consultant services to a wide variety of range users listed above. Most observational data are taken by the Range Contractor's Meteorological Systems Department, responsible for surface, upper air, and high altitude rocket measurements at Kennedy Space Center (KSC), Cape Canaveral Air Force Station (CCAFS), and the downrange island stations. The Range Contractor also does meteorological equipment maintenance and meteorological software program development and maintenance.

3. METEOROLOGICAL OBSERVATIONAL SYSTEMS

Meteorological systems used to input data to meet the forecast requirements at the ETR represent some of the best operational systems available. Those include the following.

3.1 Upper Air Instrumentation

3.1.1 Meteorological Sounding System (MSS)

Designed to provide highly precise, 0.1 second interval data with the more accurate, faster commutating sondes to meet stringent ESMC test needs, the MSS is also compatible with current standard sondes. The MSS is used to make rawinsonde observations to altitudes of approximately 30 kilometers, rocketsonde observations to approximately 65 kilometers, and windsonde observations to at least 20 kilometers. The system receives in the 1660 to 1700MHz frequency range from balloon-borne radiosondes or rocketsondes. The system transmits in the 400-406 MHz frequency range as the up-link carrier for a

2. METEOROLOGICAL ORGANIZATION AND FUNCTION

The Commander, Detachment 11, 2nd Weather Squadron, is the Staff Meteorologist (ESMC/WE) to the ESMC. Detachment 11 provides meteorological, environmental, and aerospace support to the ESMC, ETR, NASA, Air Force Technical Applications Center (AFTAC), and DOD Manager for Space Transportation System Contingency Support Office (DDMS). Detachment personnel provide forecasts, observations, climatological studies, and consultant services to a wide variety of range users listed above. Most observational data are taken by the Range Contractor's Meteorological Systems Department, responsible for surface, upper air, and high altitude rocket measurements at Kennedy Space Center (KSC), Cape Canaveral Air Force Station (CCAFS), and the downrange island stations. The Range Contractor also does meteorological equipment maintenance and meteorological software program development and maintenance.

3. METEOROLOGICAL OBSERVATIONAL SYSTEMS

Meteorological systems used to input data to meet the forecast requirements at the ETR represent some of the best operational systems available. Those include the following.

3.1 Upper Air Instrumentation

3.1.1 Meteorological Sounding System (MSS)

Designed to provide highly precise, 0.1 second interval data with the more accurate, faster commutating sondes to meet stringent ESMC test needs, the MSS is also compatible with current standard sondes. The MSS is used to make rawinsonde observations to altitudes of approximately 30 kilometers, rocketsonde observations to approximately 65 kilometers, and windsonde observations to at least 20 kilometers. The system receives in the 1660 to 1700MHz frequency range from balloon-borne radiosondes or rocketsondes. The system transmits in the 400-406 MHz frequency range as the up-link carrier for a

Table 2. Summary of major launches at the ETR 1980-1985.

S **ELECTION**
JAN 12 1987

ranging signal, permitting a phase comparison type range measurement between the tracker and the air-borne instrument. Tracking and ranging functions are controlled by a microprocessor System Control Unit. The entire system, including data handling, is controlled by a 32K word minicomputer. Smoothed tracking information, time correlated with the meteorological data, is stored for processing immediately after the tracking operation. The use of real time software combined with the application programs in the minicomputer can produce usable processed data in abbreviated formats at the operating site. For test support and synoptic soundings, additional processing is done on the ESMC Cyber computers at the Central Computer Complex (CCC).

3.1.2 MSS Data Inputs Below 20 Kilometers

Several instruments are used to gather specialized data in the lower 20 kilometers, in addition to the standard daily rawinsonde releases. These include: tetroons for constant density level, windsondes for wind only soundings, and Jimspheres for high resolution winds. The Jimsphere is a rigid radar reflective balloon made of mylar. It is aerodynamically stable, retains a constant volume, and is skin tracked by radar to give high resolution wind speed, direction, and shear from the surface up to 18 kilometers.

3.1.3 Rocketsondes

Atmospheric measurements are taken from an altitude of 20 kilometers (65,000 feet) up to 90 kilometers (295,000 feet), using the Super Loki meteorological rocket system. The system provides information on winds, temperature, pressure, density, speed of sound, and wind shear after data analysis and reduction by the Meteorological Data Resolution Section (MDRS). The Super Loki meteorological rocket uses a four inch diameter, solid propellant rocket motor to carry a payload to an altitude of 60 kilometers (200,000 feet) or up to 115 kilometers (377,000 feet). Separation of the rocket motor and payload occurs at about 5,000 feet after which the dart coasts to its apogee. Four configurations are used:

a. PWN-10D meteorological probe contains a telemetry payload (sonde) consisting of a temperature sensing device and a transponder. At apogee (65 kilometers/215,000 feet), this instrument is deployed and descends on a parachute type decelerator. The transmitter telemeters temperature data from the sensor to the ground receiver. Wind data can be derived using the positions obtained from either the ground receiver or range radars.

b. PWN-10D, MOD I meteorological probe is similar to the 10D, but the rocket motor follows a stable ballistic flight to impact.

c. PWN-11D meteorological probe carries a temperature sensing device and transmitter to approximately 75 kilometers (240,000 feet).

d. PWN-12A meteorological probe carries an inflatable mylar sphere (Robin) to an apogee altitude of approximately 115 kilometers

(377,000 feet). The sphere is ejected, inflates, and is radar skin tracked during its descent to provide atmospheric wind data from 90 kilometers (295,000 feet). Atmospheric density data are calculated from the vertical deceleration of the sphere and winds are calculated from the horizontal displacements of the sphere as it falls. Pressure and temperature data are calculated to fit the measured density profile using the equation of state.

3.2 Local Surface Observing System

In addition to the normal surface observations, the following systems are in use at the KSC/CCAFS complex.

3.2.1 Weather Information Network Display System (WINDS)

The WINDS consists of 25 instrumented towers plus instruments along the Shuttle runway launch pads that feed information into the Cape Canaveral Forecast Facility (CCFF). Sensors are mounted at heights of 30 to 54 plus one tower with sensors to 500 feet and other towers instrumented to 200 feet. The sensors provide wind direction and speed, temperature, dew point, and atmospheric pressure. Data are recorded every six seconds and averaged to a five minute value. The network has been temporarily expanded to include another 20 sites.

3.2.2 WSR-74C Weather Radar

The WSR-74C radar console is located in the CCFF while the transmitter/receiver antenna is located atop Building 423 at Patrick AFB. This weather radar provides displays of the horizontal and vertical cross sections and intensity measurements of precipitation areas within a 250 nautical mile radius of Patrick AFB. A digital video integrator and processor permits automatic contouring of precipitation intensity levels. Antenna controls provide for continuous scan, manual positioning, and elevation sector scan selection. The radar presentation can be displayed over the closed circuit television (CCTV) system. The CCFF also has dial-up access to the National Weather Service (NWS) radar at Daytona Beach and other NWS radar locations.

3.2.3 Launch Pad Lightning Warning System (LPLWS)

The LPLWS was designed to assist forecasters at the CCFF to monitor impending and current atmospheric electrical activity. It gives the forecasters information on trends in electric field potential and on locations of highly charged clouds and charge centers associated with lightning. The LPLWS consists of 34 electric field mills, computer software for reduction, and a CRT display in the CCFF. Its static field program contours the field mill data during periods without lightning. During lightning activity, the LPLWS program outputs the charge centers or source of the lightning activity.

3.1.2 MSS Data Inputs Below 20 Kilometers

Several instruments are used to gather specialized data in the lower 20 kilometers, in addition to the standard daily rawinsonde releases. These include: tetroons for constant density level, windsondes for wind only soundings, and Jimspheres for high resolution winds. The Jimsphere is a rigid radar reflective balloon made of mylar. It is aerodynamically stable, retains a constant volume, and is skin tracked by radar to give high resolution wind speed, direction, and shear from the surface up to 18 kilometers.

3.1.3 Rocketsondes

Atmospheric measurements are taken from an altitude of 20 kilometers (65,000 feet) up to 90 kilometers (295,000 feet), using the Super Loki meteorological rocket system. The system provides information on winds, temperature, pressure, density, speed of sound, and wind shear after data analysis and reduction by the Meteorological Data Resolution Section (MDRS). The Super Loki meteorological rocket uses a four inch diameter, solid propellant rocket motor to carry a payload to an altitude of 60 kilometers (200,00 feet) or up to 115 kilometers (377,000 feet). Separation of the rocket motor and payload occurs at about 5,000 feet after which the dart coasts to its apogee. Four configurations are used:

a. PWN-10D meteorological probe contains a telemetry payload (sonde) consisting of a temperature sensing device and a transponder. At apogee (65 kilometers/215,000 feet), this instrument is deployed and descends on a parachute type decelerator. The transmitter telemeters temperature data from the sensor to the ground receiver. Wind data can be derived using the positions obtained from either the ground receiver or range radars.

b. PWN-10D, MOD I meteorological probe is similar to the 10D, but the rocket motor follows a stable ballistic flight to impact.

c. PWN-11D meteorological probe carries a temperature sensing device and transmitter to approximately 75 kilometers (240,000 feet).

d. PWN-12A meteorological probe carries an inflatable mylar sphere (Robin) to an apogee altitude of approximately 115 kilometers

System (WINDS)

The WINDS consists of 25 instrumented towers plus instruments along the Shuttle runway and launch pads that feed information into the Cape Canaveral Forecast Facility (CCFF). Sensors are mounted at heights of 30 to 54 feet plus one tower with sensors to 500 feet and two other towers instrumented to 200 feet. The sensors provide wind direction and speed, temperature, dew point, and atmospheric pressure. Data are recorded every six seconds and averaged to a five minute value. The network has been temporarily expanded to include another 20 sites.

3.2.2 WSR-74C Weather Radar

The WSR-74C radar console is located in the CCFF while the transmitter/receiver antenna is located atop Building 423 at Patrick AFB. This weather radar provides displays of the horizontal and vertical cross sections and intensity measurements of precipitation areas within a 250 nautical mile radius of Patrick AFB. A digital video integrator and processor permits automatic contouring of precipitation intensity levels. Antenna controls provide for continuous scan, manual positioning, and elevation sector scan selection. The radar presentation can be displayed over the closed circuit television (CCTV) system. The CCFF also has dial-up access to the National Weather Service (NWS) radar at Daytona Beach and other NWS radar locations.

3.2.3 Launch Pad Lightning Warning System (LPLWS)

The LPLWS was designed to assist forecasters at the CCFF to monitor impending and current atmospheric electrical activity. It gives the forecasters information on trends in electric field potential and on locations of highly charged clouds and charge centers associated with lightning. The LPLWS consists of 34 electric field mills, computer software for reduction, and a CRT display in the CCFF. Its static field program contours the field mill data during periods without lightning. During lightning activity, the LPLWS program outputs the charge centers or source of the lightning activity.

3.2.4 Lightning Location and Protection (LLP) System

This lightning detection system locates cloud-to-ground lightning in the Patrick AFB, CCAFS and KSC areas. This system complements the LPLWS which can locate charge centers, but not actual ground strike locations. The LLP system consists of two independent systems--a low gain and a medium gain system. The low gain system has two direction finder (DF) antennas, one located at Space Coast Executive Airport and the other on North KSC. The low gain DFs can detect lightning from within 100 kilometers. The medium gain system has three DFs located at Melbourne Airport, Orlando Airport, and North KSC. These DFs detect lightning within 200 kilometers. The low and medium gain systems have their own central position analyzer (PA). The DFs communicate to their respective PA via half-duplex lines. The medium gain system is designed to detect only negatively charged strokes; however, the low gain system detects both negative and positive strokes.

4. DATA ANALYSIS AND DISPLAY SYSTEM

To assist the forecaster with the problems of integrating data from various sources and producing mission support products which use available data in an internally consistent manner, the Meteorological Interactive Data Display System (MIDDS) was developed under contract with the Space and Science Engineering Center (SSEC). That contract was funded jointly by KSC and the ETR. The MIDDS (Young, 1985) consists of an IBM computer with appropriate peripherals and workstations in supporting a variation of the Man Computer Interactive Data Access System (McIDAS) software (Suomi, 1983). The system provides integration of the data sources available to the CCFE into a single data base where the various types of data can be melded and displayed together for forecaster use. It also provides growth for new data sources and allows for a significant increase in the applications which the forecasters and system users are expected to make after they become more familiar with the power of the system.

The MIDDS, still under development, will input worldwide meteorological observations, satellite data, and all local sources. The MIDDS has been described elsewhere in detail (Young et al 1985 and Boyd and Myers, 1986) and specific utilization detailed by Myers and Boyd (1985) and Kolczynski et al (1986).

4.1 Data Inputs to MIDDS

The MIDDS global data input consists of real time Geostationary Operational Environmental Satellite (GOES) data and hourly conventional data received via the FAA604 circuit. Gridded data via the NWS Numerical Meteorological Center's products circuit are planned. Local data bases are input from the WINDS, LLP, LPLWS, and upper air sensors. Radar improvements have been subcontracted out by SSEC to include a volumetric scan radar with associated products which will be incorporated into the MIDDS.

4.2 MIDDS Software

The MIDDS software can be divided into four categories of interest to the meteorologist. They are support software, interactive workstation software, meteorological software, and image processing software.

Support software includes: the ingestors which monitor the incoming data for unique events and trigger other programs, the system scheduler which starts activities based on time, builds displays of various products and maintains them automatically without forecaster intervention, and the user interface building sub-system which allows the user to create or modify plain language menu templates which invoke commands and processes with single stroke action by the user.

The interactive workstation software controls the workstation, and provides instant access to the image and graphic displays stored in the workstation. Other workstation commands provide looping of graphics, images, or both; annotation of graphics; superposition of graphics on images; interactive gray scale modification; and compositing of two images.

The meteorological software provides extensive capabilities for the forecaster to create numerous products of interest.

The image processing software provides image display, image enhancement in gray scale and frequency domains, multi-image combination products, and dynamic 3-D loops of the satellite images.

5. COMPUTER PROGRAMS AND MODEL SUPPORT

5.1 Meteorological Data Reduction Section (MDRS)

Meteorological computer programs run at the CCC are maintained by the Range Contractor's MDRS. Meteorological programs are basically of two types; programs that process data in a batch mode, and those that process continuously. There are approximately 50 weather programs on the Cyber 740 and NOVA 3 computers and another 27 for various applications on the Meteorological Sounding System. During major launches, the weather programs must be integrated into the ETR's intensive CCC schedule.

5.2 Blast Damage Assessment Prediction Model

A Blast Damage Assessment Model is run at the CCC to help ESMC Safety assess potential property damage and consequent casualties in the event of an inadvertent detonation of a rocket or missile system during launch. The potential hazards depend upon several factors including explosive yield, the meteorological conditions, and the distance to population centers. Meteorological inputs to the model are pressure, wind, temperature and dewpoint from the instrumented wind towers and rawinsondes. Monte Carlo simulation techniques are used to evaluate uncertainties in meteorological data and resulting propagation conditions. As a by-product of the Monte Carlo simulation techniques, the model produces not only the expected value of airblast property damage and casualties, but also

designed to detect only negatively charged strokes; however, the low gain system detects both negative and positive strokes.

4. DATA ANALYSIS AND DISPLAY SYSTEM

To assist the forecaster with the problems of integrating data from various sources and producing mission support products which use available data in an internally consistent manner, the Meteorological Interactive Data Display System (MIDDS) was developed under contract with the Space and Science Engineering Center (SSEC). That contract was funded jointly by KSC and the ETR. The MIDDS (Young, 1985) consists of an IBM computer with appropriate peripherals and workstations in supporting a variation of the Man Computer Interactive Data Access System (McIDAS) software (Suomi, 1983). The system provides integration of the data sources available to the CCF into a single data base where the various types of data can be melded and displayed together for forecaster use. It also provides growth for new data sources and allows for a significant increase in the applications which the forecasters and system users are expected to make after they become more familiar with the power of the system.

The MIDDS, still under development, will input worldwide meteorological observations, satellite data, and all local sources. The MIDDS has been described elsewhere in detail (Young et al 1985 and Boyd and Myers, 1986) and specific utilization detailed by Myers and Boyd (1985) and Kolczynski et al (1986).

4.1 Data Inputs to MIDDS

The MIDDS global data input consists of real time Geostationary Operational Environmental Satellite (GOES) data and hourly conventional data received via the FAA604 circuit. Gridded data via the NWS Numerical Meteorological Center's products circuit are planned. Local data bases are input from the WINDS, LLP, LPLWS, and upper air sensors. Radar improvements have been subcontracted out by SSEC to include a volumetric scan radar with associated products which will be incorporated into the MIDDS.

access to the image and graphic displays stored in the workstation. Other workstation commands provide looping of graphics, images, or both; annotation of graphics; superposition of graphics on images; interactive gray scale modification; and compositing of two images.

The meteorological software provides extensive capabilities for the forecaster to create numerous products of interest.

The image processing software provides image display, image enhancement in gray scale and frequency domains, multi-image combination products, and dynamic 3-D loops of the satellite images.

5. COMPUTER PROGRAMS AND MODEL SUPPORT

5.1 Meteorological Data Reduction Section (MDRS)

Meteorological computer programs run at the CCC are maintained by the Range Contractor's MDRS. Meteorological programs are basically of two types; programs that process data in a batch mode, and those that process continuously. There are approximately 50 weather programs on the Cyber 740 and NOVA 3 computers and another 27 for various applications on the Meteorological Sounding System. During major launches, the weather programs must be integrated into the ETR's intensive JCC schedule.

5.2 Blast Damage Assessment Prediction Model

A Blast Damage Assessment Model is run at the CCC to help ESMC Safety assess potential property damage and consequent casualties in the event of an inadvertent detonation of a rocket or missile system during launch. The potential hazards depend upon several factors including explosive yield, the meteorological conditions, and the distance to population centers. Meteorological inputs to the model are pressure, wind, temperature and dewpoint from the instrumented wind towers and rawinsondes. Monte Carlo simulation techniques are used to evaluate uncertainties in meteorological data and resulting propagation conditions. As a by-product of the Monte Carlo simulation techniques, the model produces not only the expected value of airblast property damage and casualties, but also

estimates of upper bound values of these parameters.

5.3 Rocket Exhaust Effluent Diffusion Model (REEDM)

REEDM is used to forecast the diffusion of the rocket exhaust ground cloud. The REEDM computer code includes basic mathematical expressions for atmospheric dispersion models, cloud-rise models, and models for calculating the gravitational deposition of acid droplets from the exhaust cloud. In addition to tabular output, four input parameters (temperature, potential temperature, wind speed, and wind direction) are graphically output for easy identification of atmospheric changes.

5.4 Meteorological And Range Safety Support (MARSS)

The MARSS system was developed by ENSCO, Inc., under contract to the U.S. Air Force, for the real-time assessment of toxic material spills. The initial version of MARSS has been used operationally since early May 1984 at the CCAFS and KSC. An enhanced version of MARSS with full color graphics, a high resolution map background, crash grid, and a combined toxic corridor-trajectory forecast model became operational during the summer 1985. The system supplies the user with displays of local winds (both as wind barbs and as a wind field) and a forecast of the ground level footprint of a toxic cloud resulting from a hazardous materials release. The MARSS program also provides graphic displays of weather tower data, rocket exhaust diffusions, and tabular numeric outputs (Bobowicz, 1985).

6. FORECASTING SYSTEMS

In addition to the systems discussed, additional efforts to improve forecasts include the following.

6.1 Model Improvements

Air Force contracts are presently in force to improve all models listed above. A KSC contract is currently funded to explore the possibility of incorporating a version of the Pilke 3D Model or Pilke 2D Model for use at the CCFE for seabreeze induced formation of thunderstorms.

6.2 Weather Expert Forecasting System

Arthur D. Little, Incorporated completed an evaluation and feasibility study and is currently under a KSC contract for a Thunderstorm Weather Forecasting Expert System (TWFE) Prototype Development Project. The objective is to demonstrate the feasibility of the A. D. Little developed architecture by capturing and encoding in scenario-form weather forecasting expertise related to forecasting thunderstorms which form within five miles of the Shuttle operational areas.

7. SUMMARY

A general overview of the organizational structure, mission, and special meteorological

systems at the ETR has been presented. For more details on any particular area, one is referred to the papers referenced.

8. REFERENCES

- Bobowicz, T. J., (1985): The Meteorological and Range Safety Support (MARSS) System, Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc., 73-80.
- Boyd, B. F. and C. R. Bowan, (1985): "Diffusion Modeling in Support of the Space Shuttle" presented at the Joint Army-Navy-NASA-Air Force Safety and Environmental Protection Subcommittee Meeting, Monterey, CA; 4-8 Nov 85.
- Boyd, B. F. and T. M. Myers, (1986): Interactive Information and Processing Systems Used for Meteorological Support to the Eastern Test Range, Preprints Second International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography, and Hydrology, Miami, FL, Amer. Meteor. Soc., 36-42.
- ESMC, (1985): "Economic Resource Impact Statement" by the Management Analysis Division, 87pp.
- ESMC, (1986): ESMC 105-1, "Meteorological Handbook", 37pp.
- Lockwood, F. P., (1986): Cape Canaveral Forecast Facility Equipment Operations Handbook, 106pp.
- Kolczynski, E. F., T. M. Myers, and B. F. Boyd, (1986): Meteorological Range Support Requirements and Implications for the Future of Shuttle Operations (Paper AIAA-86-0095 presented at the AIAA 24th Aerospace Sciences Meeting, Reno, NV, 6-8 Jan 86.)
- Myers, T. M. and B. F. Boyd, (1985): Status Report on the Applications of the Meteorological Interactive Data Display System to Space Shuttle and Range Support at the Kennedy Space Center and Cape Canaveral AFS, Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc. 73-80.
- Suomi, V. E., R. Fox, S. S. Limage, and W. L. Smith, (1983): McIDAS III: A modern Interactive Data Access and Analysis System, J. of Climate and Appl. Meteor., 22, 766-788.
- Young, J. T., C. Norton, R. Uram, R. Oehlken, R. Fox, D. Wade, T. Whittaker, J. Benson, and J. Rueden, (1985): The Meteorological Interactive Data Display System, Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., 334-339.

5.4 Meteorological And Range Safety Support (MARSS)

The MARSS system was developed by ENSCO, Inc., under contract to the U.S. Air Force, for the real-time assessment of toxic material spills. The initial version of MARSS has been used operationally since early May 1984 at the CCAFS and KSC. An enhanced version of MARSS with full color graphics, a high resolution map background, crash grid, and a combined toxic corridor-trajectory forecast model became operational during the summer 1985. The system supplies the user with displays of local winds (both as wind barbs and as a wind field) and a forecast of the ground level footprint of a toxic cloud resulting from a hazardous materials release. The MARSS program also provides graphic displays of weather tower data, rocket exhaust diffusions, and tabular numeric outputs (Bobowicz, 1985).

6. FORECASTING SYSTEMS

In addition to the systems discussed, additional efforts to improve forecasts include the following.

6.1 Model Improvements

Air Force contracts are presently in force to improve all models listed above. A KSC contract is currently funded to explore the possibility of incorporating a version of the Pilke 3D Model or Pilke 2D Model for use at the CCAFS for seabreeze induced formation of thunderstorms.

6.2 Weather Expert Forecasting System

Arthur D. Little, Incorporated completed an evaluation and feasibility study and is currently under a KSC contract for a Thunderstorm Weather Forecasting Expert System (TWFS) Prototype Development Project. The objective is to demonstrate the feasibility of the A. D. Little developed architecture by capturing and encoding in scenario-form weather forecasting expertise related to forecasting thunderstorms which form within five miles of the Shuttle operational areas.

7. SUMMARY

A general overview of the organizational structure, mission, and special meteorological

Boyd, B. F. and T. M. Myers, (1986): Interactive Information and Processing Systems Used for Meteorological Support to the Eastern Test Range, Preprints Second International Conference on Interactive Information and Processing Systems for Meteorology, Oceanography, and Hydrology, Miami, FL, Amer. Meteor. Soc., 36-42.

ESMC, (1985): "Economic Resource Impact Statement" by the Management Analysis Division, 87pp.

ESMC, (1986): ESMC 105-1, "Meteorological Handbook", 37pp.

Lockwood, F. P., (1986): Cape Canaveral Forecast Facility Equipment Operations Handbook, 106pp.

Kolczynski, E. F., T. M. Myers, and B. F. Boyd, (1986): Meteorological Range Support Requirements and Implications for the Future of Shuttle Operations (Paper AIAA-86-0095 presented at the AIAA 24th Aerospace Sciences Meeting, Reno, NV, 6-8 Jan 86.)

Myers, T. M. and B. F. Boyd, (1985): Status Report on the Applications of the Meteorological Interactive Data Display System to Space Shuttle and Range Support at the Kennedy Space Center and Cape Canaveral AFS, Preprints Conference on Aerospace and Range Meteorology, Huntsville, AL, Amer. Meteor. Soc. 73-80.

Suomi, V. E., R. Fox, S. S. Limage, and W. L. Smith, (1983): McIDAS III: A modern Interactive Data Access and Analysis System, J. of Climate and Appl. Meteor., 22, 766-788.

Young, J. T., C. Norton, R. Uram, R. Oehlken, R. Fox, D. Wade, T. Whittaker, J. Benson, and J. Rueden, (1985): The Meteorological Interactive Data Display System, Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., 334-339.

END

DATE
FILMED

2-87

... a RSC contract for a Thunderstorm Weather Forecasting Expert System (TWFES) Prototype Development Project. The objective is to demonstrate the feasibility of the A. D. Little developed architecture by capturing and encoding in scenario-form weather forecasting expertise related to forecasting thunderstorms which form within five miles of the Shuttle operational areas.

7. SUMMARY

A general overview of the organizational structure, mission, and special meteorological

system, J. of Climate and Appl. Meteor., 22, 766-788.

Young, J. T., C. Norton, R. Uram, R. Oehlken, R. Fox, D. Wade, T. Whittaker, J. Benson, and J. Rueden, (1985): The Meteorological Interactive Data Display System, Preprints Second International Conference on the Aviation Weather System, Montreal, Amer. Meteor. Soc., 334-339.